

Electromagnetic Flow Meter

KWLDG Series



The Ketwells, KWLDG Series Electromagnetic flow meter is flexible and universally applicable flow measurement systems. It is a velocity flow meter which does not have any moving parts and is ideal for conductive fluid.

Applications

- Water treatment
- Water distribution
- Industrial waste water
- Industrial processes
- Slurries Irrigation
- Pumping station
- Dams
- Mining

Features

- High accuracy and wide flow rate range measurement
- 99.999% pure copper for coil
- No mechanically moving parts
- IP68 proof, Maximum 3 meter immersion in water
- Drinking water approvals
- FDA approvals
- Bi-directional measure
- Wide choice of materials for housing and flanges including SS304 and SS316
- Advanced wire-winding technology, No drift zero point
- Robust, fully welded and potted construction
- In house wet calibration for all diameters (up to DN3000)
- Three electrodes
- $\geq 3\text{mm}$ thickness PTFE liner, durable service life



Y Type



B Type



L-Remote Type


Electromagnetic Flow Meter

KWLDG Series




Technical Data

Diameter	PTFE: DN2.5... DN1000
	Rubber: DN50... DN3000
Flow Direction	Positive; Negative
Repeatability Error	±1%
Accuracy	±0.5% of rate; ±0.2% of rate
Medium Temperature	Rubber Liner: -20... +60°C
	PTFE Liner: -20... +120°C
	PFA: -20... +180°C
Velocity	0.3... 10m/s
Ambient Temperature	-20... +60°C
Relative Humidity	5%... 95%
Power Consumption	<20W
Protection	IP65; IP68 (Remote Type)

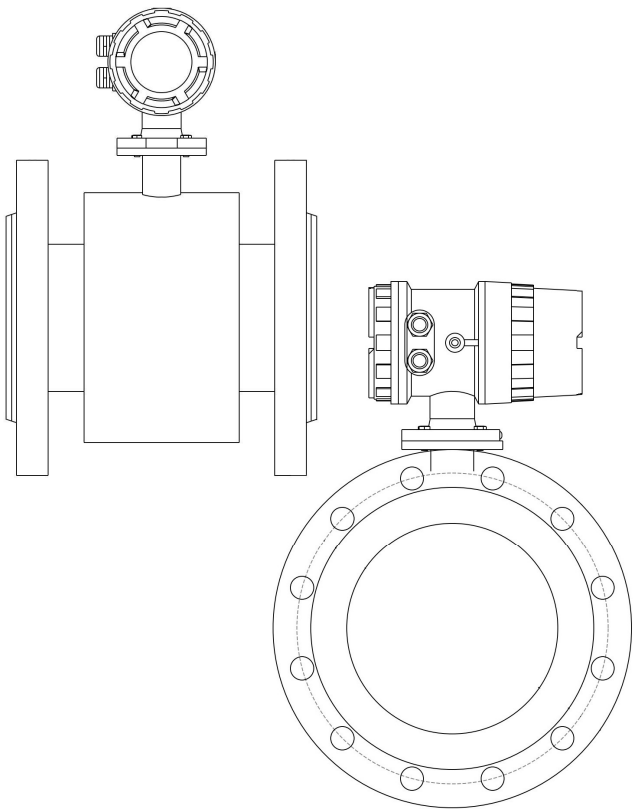

Compact Type

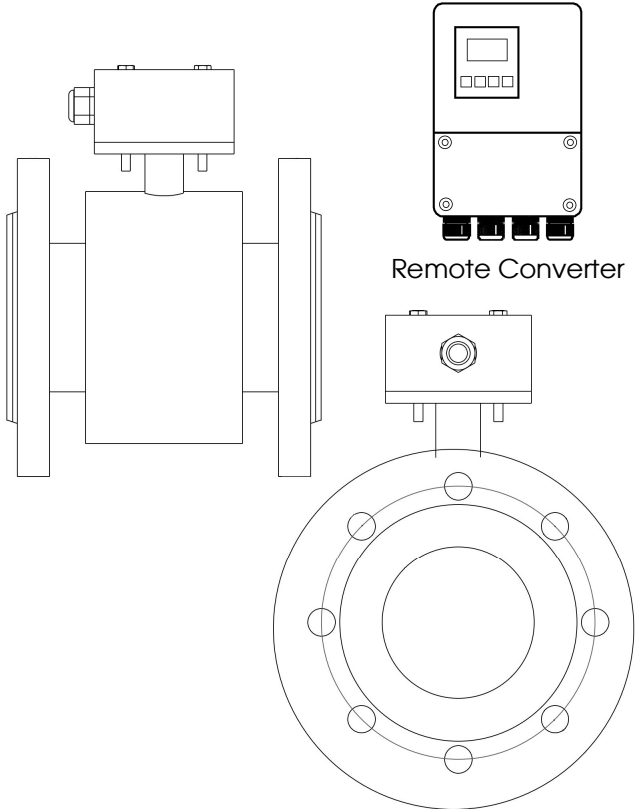

Remote Type

Electromagnetic Flow Meter

KWLDG Series

Flow Range

Diameter		Flow Rate (m³/h)		
		V = 0.3m/s	V = 6m/s	V = 10m/s
mm	Inch	Min	Calibrated	Max
2.5	1/10"	0.0053	0.106	0.177
4	1/8"	0.014	0.27	0.452
6	1/4"	0.03	0.6	1
10	3/8"	0.1	1.7	3
15	1/2"	0.2	4	6
20	3/4"	0.3	7	11
25	1"	0.5	11	18
32	1¼"	0.9	17	29
40	1½"	1	27	45
50	2"	2	42	71
65	2½"	4	72	120
80	3"	5	109	181
100	4"	8	170	283
125	5"	13	265	442
150	6"	20	382	636
200	8"	34	679	1131
250	10"	53	1060	1767
300	12"	76	1527	2545
350	14"	104	2078	3465
400	16"	136	2714	4524
450	18"	171	3435	5726
500	20"	212	4241	7069
600	24"	305	6107	10179
700	28"	415	8310	13850
800	32"	542	10860	18100
900	36"	662	13740	22900
1000	40"	848	16962	28270

Electromagnetic Flow Meter

KWLDG Series



Model Selection

Series	KWLDG			
Type		Y	Y Type (Option Explosion Proof)	
		B	B Type	
Diameter		XXXX	Stand for Diameter	
			0006: DN6; 0015: DN15 0100: DN100; 2200: DN2200	
Structure			S	Compact Type with Local Display
			L	Remote Type with 10 Meters Cable
Electrode Material			M	SS316L
			T	Titanium
			D	Tantalum
			H	Hastelloy Alloy C
			P	Platinum-Iridium
Signal Output			0	No Output
			1	4-20mA/Pulse
Liner Material			X	Rubber
			P	Polyurethane
			F	PTFE
			A	PFA
Power Supply			-0	110-240V AC
			-1	24V DC (20-36V DC)
			-2	Battery Power Supply
Communication			0	No Communication
			1	Modbus RS485
			2	Hart
			3	GPRS
Sensor Grounding			0	No Grounding
			1	Grounding Ring
			2	Grounding Electrode
Connection			DXX	D16: DIN PN16 Flange; D255 DIN PN25 Flange...
			AXX	A15: ANSI 150# Flange; A30: ANSI 300# Flange ...
			JXX	J10: JIS 10K Flange; J20: JIS 20K Flange...
			XXX	On Request
Body Materail			CS	Carbon Steel
			S4	Stainless Steel 304